

RYCO

TECHNICAL BULLETIN

A5000R RYCO AIR FILTER

GEN3 SUPERCARS CONTROL PARTS BY RYCO FILTERS


PRODUCT SNAPSHOT

Part Number	A5000R Ryco Air Filter
Supercar Applications	GEN3 Camaro LS3, Mustang Coyote V8
Micron Rating	5 micron (absolute)
Flow	See graph below
Media	Nano fibre coated water repellent media
Service Interval	In dry racing conditions we recommend changing every 5000 km's

SERVICING NOTES

Inspect after every race in case of filter damage from high-velocity debris. After wet weather racing, a filter change is recommended. Fine dust and water can mix to form a layer that dries on the filter media. This will not stop the filter, but it may reduce the filter's flow. Never tap out or wash the filter, as these actions can cause damage to the structure of the filter frame or filter media.

AIR FILTER FLOW RESTRICTION

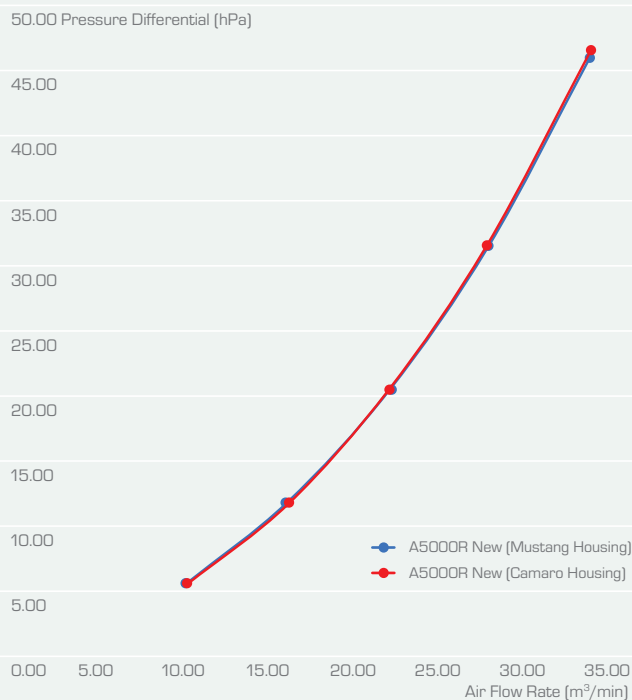

RYCOFILTERS.COM.AU | RYCO.CO.NZ

**BE
RYCO
READY**