

# RYCO

## TECHNICAL BULLETIN

## Z928ST RYCO SYNTEC OIL FILTER

### GEN3 SUPERCARS CONTROL PARTS BY RYCO FILTERS

#### PRODUCT SNAPSHOT


Supercar Application	GEN3 Mustang Coyote V8
Micron Rating	20 micron (nominal)
Efficiency Rating	99% 20 $\mu$
Flow Rate	70 LPM/ 18 GPM
Burst Pressure	3800 kPa (550 PSI)
Fuel compatibility	E75, E85
Recommended Service Interval	For racing conditions change every 2000 km's

#### ADDITIONAL PRODUCT INFORMATION

- 3800 kPa (550 PSI) is double the strength of a typical spin-on filter.
- AEM rubber seal for reduced friction during installation and removal.
- Steel spiral wound core prevents core collapse and protects against surges and during endurance events.
- No lock nut to compromise filter strength.

#### Z928ST FILTER ASSEMBLY FLOW RESTRICTION

120 Pressure Differential (kPa)

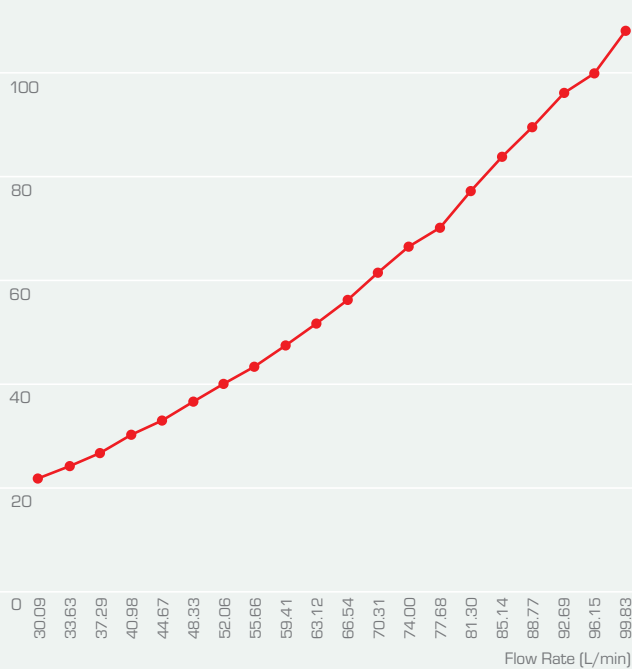

RYCOFILTERS.COM.AU | RYCO.CO.NZ

**BE  
RYCO  
READY**