

# RYCO

## TECHNICAL BULLETIN

## Z160ST RYCO SYNTEC OIL FILTER

### GEN3 SUPERCARS CONTROL PARTS BY RYCO FILTERS

#### PRODUCT SNAPSHOT



|                              |   |
|------------------------------|---|
| Supercar Application         | GEN3 Camaro LS3                               |
| Micron Rating                | 20 micron (nominal)                           |
| Efficiency Rating            | 99% 20 $\mu$                                  |
| Flow Rate                    | 70 LPM/ 18 GPM                                |
| Burst Pressure               | 3800 kPa (550 PSI)                            |
| Fuel compatibility           | E75, E85                                      |
| Recommended Service Interval | For racing conditions, change every 2000 km's |

#### ADDITIONAL PRODUCT INFORMATION

- 3800 kPa (550 PSI) is double the strength of a typical spin-on filter.
- AEM rubber seal for reduced friction during installation and removal.
- Steel spiral wound core prevents core collapse and protects against surges and during endurance events.
- No lock nut to compromise filter strength.

#### Z160ST FILTER ASSEMBLY FLOW RESTRICTION

140 Pressure Differential (kPa)

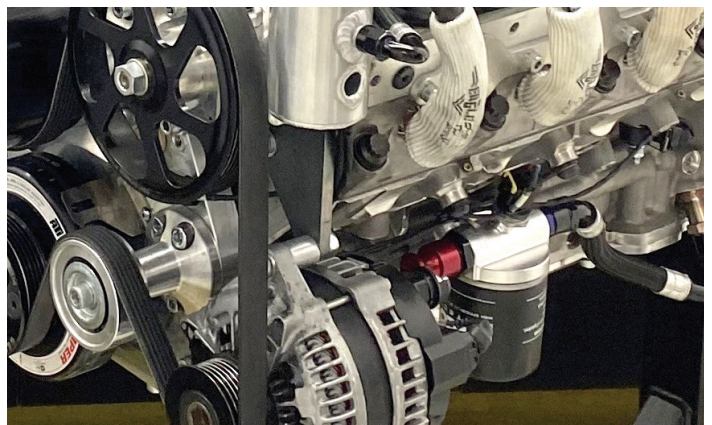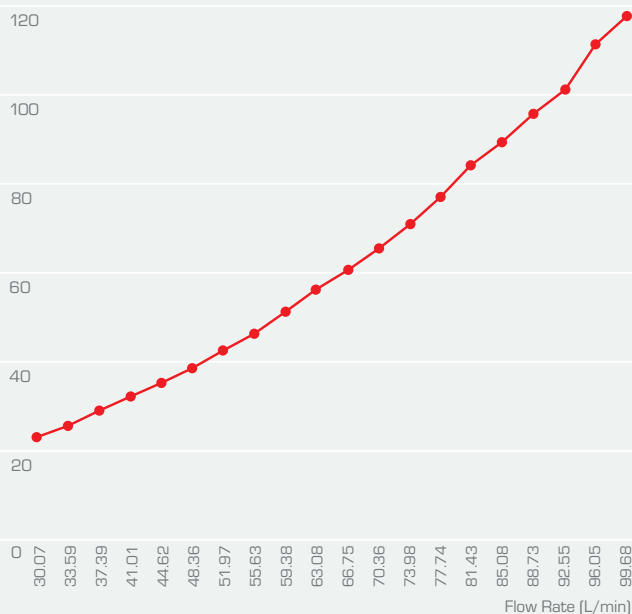

RYCOFILTERS.COM.AU | RYCO.CO.NZ

**BE  
RYCO  
READY**